


POTRUBNÍ DÍLY, TĚŽKÉ ULOŽENÍ POTRUBÍ

PIPE PARTS, HEAVY PIPES SUPPORTS

ČSN130725.0 TŘMENY Z KRUHOVÉ OCELI

ČSN130725.0 U-BOLTS FROM ROUND STEEL

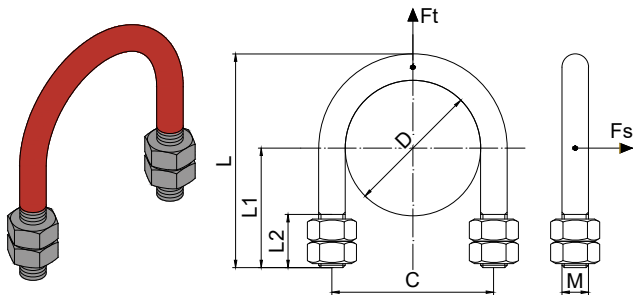

Popis:

Třmen je svou konstrukcí jednoduchý výrobek pro uchycení potrubí. Lze jej použít jako jednoduchý pevný bod (třmen se 2 maticemi) nebo kluzný bod (třmen se 4 maticemi) pro uchycení potrubí o maximální provozní teplotě do 300°C.

Třmeny dle normy ČSN130725.0 jsou dodávány včetně 4ks matic dle DIN934.

Použití:

- ocelové potrubí
- plastové potrubí
- měděné potrubí

Odvětví:

- voda, topení, plyn
- odpadní potrubí
- konstrukce pevných bodů

Description:

U-bolt is simple product for fixing the pipes. It can be used as a simple fixed point (U-bolt with two nuts) or as sliding point (U-bolt with 4 nuts) for fixing the pipes with a maximum operating temperature up to 300°C.

The U-bolts according ČSN130725.0 are supplied with 4 nuts DIN934.

Use:

- steel pipes
- plastic pipes
- copper pipes

Field:

- water, heat, gas
- waste pipes
- fixing points

Technické údaje / Technical data:

Material / Materiál:

ocel Q195 / steel Q195

Obj. číslo Supply No.	Název Name		Průměr potrubí Diameter of pipe DN	D(mm)	C Rozteč/Span (mm)	L (mm)	L1 (mm)	L2 (mm)	M Závit Thread	Hmotnost Weight (kg/pcs)	Nosnost Load capacity Fs (kg)	Nosnost Load capacity Ft (kg)	Balení Package (ks/pcs)
22400010	Třmen / U-bolt / DN10 M6 20 mm, ČSN130725.0 pozink	zinc plated	10	20	26	39,0	23	15	M6	0,027	20	100	10
22400015	Třmen / U-bolt / DN15 M6 25 mm, ČSN130725.0 pozink	zinc plated	15	25	31	44,5	26	15	M6	0,030	20	100	10
22400020	Třmen / U-bolt / DN20 M8 30 mm, ČSN130725.0 pozink	zinc plated	20	30	38	55,0	32	15	M8	0,065	40	200	10
22400025	Třmen / U-bolt / DN25 M8 36 mm, ČSN130725.0 pozink	zinc plated	25	36	44	60,0	34	15	M8	0,070	40	200	10
22400032	Třmen / U-bolt / DN32 M8 45 mm, ČSN130725.0 pozink	zinc plated	32	45	53	70,5	40	20	M8	0,081	40	200	10
22400040	Třmen / U-bolt / DN40 M10 51 mm, ČSN130725.0 pozink	zinc plated	40	51	61	80,5	45	20	M10	0,158	60	280	10
22400050	Třmen / U-bolt / DN50 M10 63 mm, ČSN130725.0 pozink	zinc plated	50	63	73	91,5	50	32	M10	0,177	60	280	10
22400065	Třmen / U-bolt / DN65 M12 80 mm, ČSN130725.0 pozink	zinc plated	65	80	92	116,0	64	40	M12	0,300	90	400	10
22400080	Třmen / U-bolt / DN80 M12 94 mm, ČSN130725.0 pozink	zinc plated	80	93	105	130,5	72	40	M12	0,350	90	400	10
22400100	Třmen / U-bolt / DN100 M16 116 mm, ČSN130725.0 pozink	zinc plated	100	116	132	164,0	90	50	M16	0,750	150	700	1
22400125	Třmen / U-bolt / DN125 M16 145 mm, ČSN130725.0 pozink	zinc plated	125	145	161	193,5	105	55	M16	0,860	150	700	1
22400150	Třmen / U-bolt / DN150 M16 170 mm, ČSN130725.0 pozink	zinc plated	150	170	186	221,0	120	55	M16	0,960	150	700	1
22400200	Třmen / U-bolt / DN200 M20 227 mm, ČSN130725.0 pozink	zinc plated	200	227	247	283,5	150	60	M20	1,950	250	1000	1
22400250	Třmen / U-bolt / DN250 M20 284 mm, ČSN130725.0 pozink	zinc plated	250	284	304	342,0	180	65	M20	2,320	250	1000	1
22400300	Třmen / U-bolt / DN300 M20 334 mm, ČSN130725.0 pozink	zinc plated	300	334	354	392,0	205	65	M20	2,640	250	1000	1
22400350	Třmen / U-bolt / DN350 M20 365 mm, ČSN130725.0 pozink	zinc plated	350	365	385	422,5	220	70	M20	2,840	250	1000	1

Uvedená nosnost je pouze informativní a je vypočtena pro třmeny z oceli 11 373.0 pro nejvyšší pracovní teplotu 300 °C. / The load capacity is only for information and calculated for the pipe clamps of steel 11 373 for the maximum working temperature of 300 °C.

22402010	Třmen / U-bolt / DN10 M6 20 mm, ČSN130725.0 NEREZ A2	stainless	10	20	26	39,0	23	15	M6	0,027	-	-	1
22402015	Třmen / U-bolt / DN15 M6 25 mm, ČSN130725.0 NEREZ A2	stainless	15	25	31	44,5	26	15	M6	0,030	-	-	1
22402020	Třmen / U-bolt / DN20 M8 30 mm, ČSN130725.0 NEREZ A2	stainless	20	30	38	55,0	32	15	M8	0,065	-	-	1
22402025	Třmen / U-bolt / DN25 M8 36 mm, ČSN130725.0 NEREZ A2	stainless	25	36	44	60,0	34	15	M8	0,070	-	-	1
22402032	Třmen / U-bolt / DN32 M8 45 mm, ČSN130725.0 NEREZ A2	stainless	32	45	53	70,5	40	20	M8	0,081	-	-	1
22402040	Třmen / U-bolt / DN40 M10 51 mm, ČSN130725.0 NEREZ A2	stainless	40	51	61	80,5	45	20	M10	0,158	-	-	1
22402050	Třmen / U-bolt / DN50 M10 63 mm, ČSN130725.0 NEREZ A2	stainless	50	63	73	91,5	50	32	M10	0,177	-	-	1
22402065	Třmen / U-bolt / DN65 M12 80 mm, ČSN130725.0 NEREZ A2	stainless	65	80	92	116,0	64	40	M12	0,300	-	-	1
22402080	Třmen / U-bolt / DN80 M12 94 mm, ČSN130725.0 NEREZ A2	stainless	80	93	105	130,5	72	40	M12	0,350	-	-	1
22402100	Třmen / U-bolt / DN100 M16 116 mm, ČSN130725.0 NEREZ A2	stainless	100	116	132	164,0	90	50	M16	0,750	-	-	1
22402125	Třmen / U-bolt / DN125 M16 145 mm, ČSN130725.0 NEREZ A2	stainless	125	145	161	193,5	105	55	M16	0,860	-	-	1
22402150	Třmen / U-bolt / DN150 M16 170 mm, ČSN130725.0 NEREZ A2	stainless	150	170	186	221,0	120	55	M16	0,960	-	-	1
22402200	Třmen / U-bolt / DN200 M20 227 mm, ČSN130725.0 NEREZ A2	stainless	200	227	247	283,5	150	60	M20	1,950	-	-	1
22402250	Třmen / U-bolt / DN250 M20 284 mm, ČSN130725.0 NEREZ A2	stainless	250	284	304	342,0	180	65	M20	2,320	-	-	1
22402300	Třmen / U-bolt / DN300 M20 334 mm, ČSN130725.0 NEREZ A2	stainless	300	334	354	392,0	205	65	M20	2,640	-	-	1
22402350	Třmen / U-bolt / DN350 M20 365 mm, ČSN130725.0 NEREZ A2	stainless	350	365	385	422,5	220	70	M20	2,840	-	-	1